


Fascia Cover Installation


See instructions provided with fascia cover.

Fascia Installation

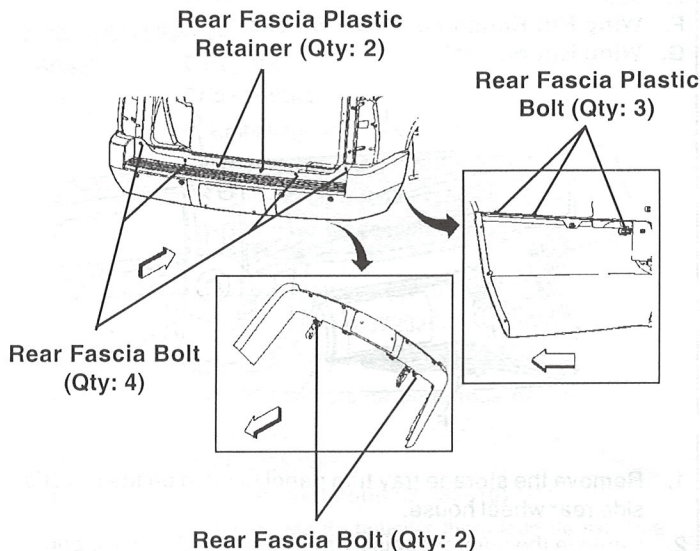

- Reinstall the rear bumper fascia.
Rear Fascia Bolt
Tighten: 9 Nm (80 lb in)
Rear Fascia Plastic Bolt
Tighten: 9 Nm (80 lb in)
- Reconnect the rear object detection sensor harness located in the right end of the fascia, along with any other electrical connectors.
Rear Fascia Bolt
Tighten: 9 Nm (80 lb in)
Rear Fascia Plastic Retainer


Reinstall the right and left hand rear wheelhouse liners.

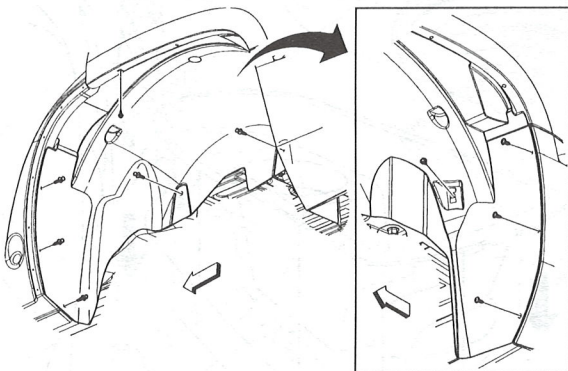

- Rear Wheelhouse Liner Retainer (Qty: 3)
- Rear Wheelhouse Liner Screw (Qty: 7)
Tighten: 2 Nm (18 lb in)
- Rear Wheelhouse Liner

Reinstall the Rear Tire and Wheel Assemblies

- Install the tire and wheel assembly.

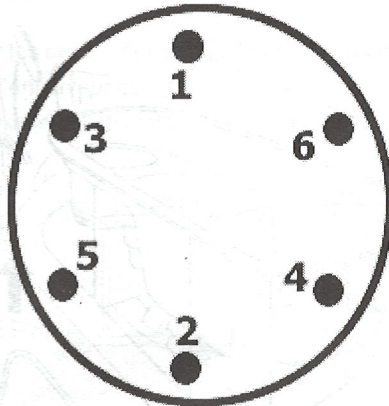

- Hand start the wheel nuts.
Tighten: 165 Nm (1460 lb in)

Using the J 39544-KIT (proper size torque stick), tighten the wheel nuts in sequence. Refer to [Fastener Tightening Specifications](#).

Notice: Improperly tightened wheel bolts or nuts can lead to brake pulsation and rotor damage. In order to avoid expensive brake repairs, evenly tighten the wheel bolts or nuts to the proper torque specification.

- Install the wheel center caps.
- Install the wheel cap nuts, if required.
- Remove the support and lower the vehicle.
- Install spare tire vehicle placard.

Tire Label

To locate the label within the red box, place the label in the blank space directly beneath the rear tire information. When properly placed, the new tire label will not obscure any of the original tire information. Be sure that the surface is clean and dry. The surface temperature should not be less than 21°C (65°F). The label is provided as a guide for tire inflation pressures and information relevant to occupant/cargo capacities.

Spare Tire Kit

REV 14MR08

PART NO.

19202099

SHEET

5

OF 18

ALL INFORMATION WITHIN ABOVE BORDER TO BE PRINTED EXACTLY AS SHOWN ON 8.5x11 WHITE 16 POUND NON-BOND RECYCLABLE PAPER. PRINT ON BOTH SIDES, EXCLUDING TEMPLATES. TO BE UNITIZED IN ACCORDANCE WITH GMSPO SPECIFICATIONS.

DATE	REVISION	AUTH	DR

TITLE

INSTALLATION INSTRUCTIONS
Spare Tire Kit

PART NO.

19202099

SHEET

5

OF 18