

Spare Tire Kit

Available Only Through GM Accessories

Models: 2008 Chevrolet Tahoe Hybrid
2008 GMC Yukon Hybrid

Kit Contents:


Item	Description
A	Jack and Tools <ul style="list-style-type: none"> Jack Package (15783361) Toolkit (15854611) Retainer (15043019) 3 Nuts Stowage Bracket (11517009)
B	Hoist (25792482) <ul style="list-style-type: none"> Guide Tube (10372326) Hoist Bolt (11517827)
C	Case Assembly Spare Wheel (15827206)
D	Wheel (09595852)
E	Heat Shield (25783810) <ul style="list-style-type: none"> M8 Exhaust Shield Bolt (11518341)
F	Exhaust Resonator (25851500)
G	Dealer Instruction Sheet (19202099)
H	Tire Info Placard (19202098)

* P265/70R17 Tire and Fascia Cover are not included in the Kit and need to be ordered separately.

NOTE: DANGER!! Always perform the High Voltage Disabling Procedure prior to servicing, see Service Manual for procedure.

Lift the Vehicle by Following the Procedure Outlined Below

1. Remove the wheel nut caps, if equipped.
2. Remove the wheel center cap.
3. Loosen lug nuts on rear wheels.

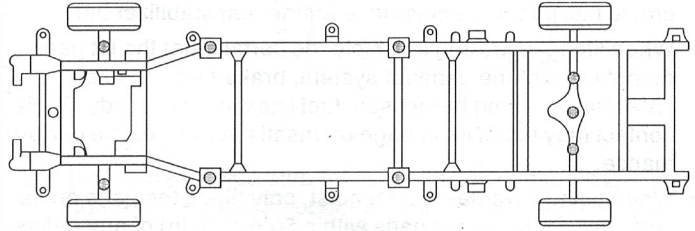


Caution: To avoid any vehicle damage, serious personal injury or death when major components are removed from the vehicle and the vehicle is supported by a hoist, support the vehicle with jack stands at the opposite end from which the components are being removed and strap the vehicle to the hoist.

Caution: To avoid any vehicle damage, serious personal injury or death, always use the jack stands to support the vehicle when lifting the vehicle with a jack.

Notice: Perform the following steps before beginning any vehicle lifting or jacking procedure:

- Remove or secure all of the vehicle's contents in order to avoid any shifting or any movement that may occur during the vehicle lifting or jacking procedure.
- The lifting equipment or the jacking equipment weight rating must meet or exceed the weight of the vehicle and any vehicle contents.
- The lifting equipment or the jacking equipment must meet the operational standards of the lifting equipment or jacking equipment's manufacturer.
- Perform the vehicle lifting or jacking procedure on a clean, hard, dry, level surface.
- Perform the vehicle lifting or jacking procedure only at the identified lift points. DO NOT allow the lifting equipment or jacking equipment to contact any other vehicle components.

Failure to perform the previous steps could result in damage to the lifting equipment or the jacking equipment, the vehicle, and/or the vehicle's contents.

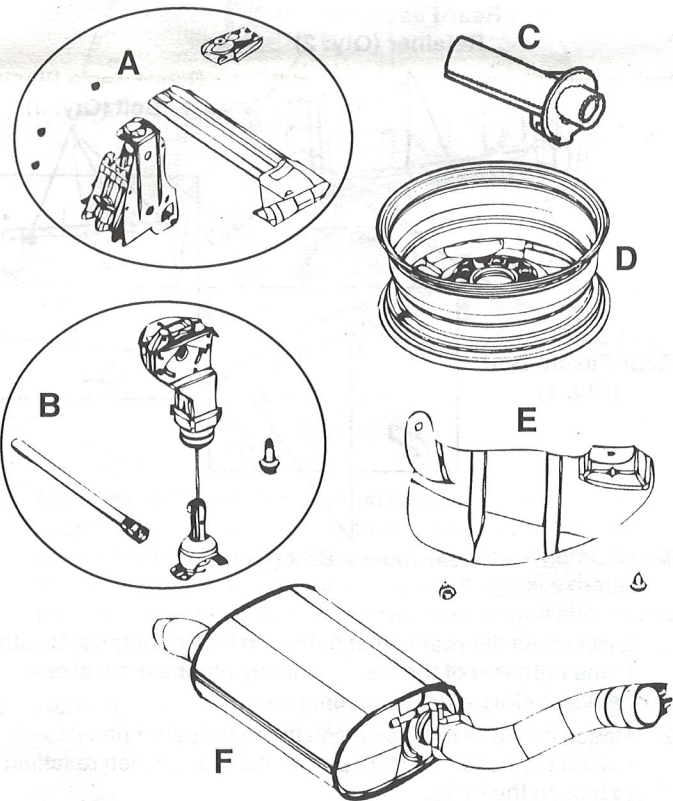

Spare Tire Kit

REV 14MR08

PART NO.

19202099

SHEET

1

OF **18**

ALL INFORMATION WITHIN ABOVE BORDER TO BE PRINTED EXACTLY AS SHOWN ON 8.5x11 WHITE 16 POUND NON-BOND RECYCLABLE PAPER. PRINT ON BOTH SIDES, EXCLUDING TEMPLATES. TO BE INITIALIZED IN ACCORDANCE WITH GMSPO SPECIFICATIONS.

DATE	REVISION	AUTH	DR
05DE07	Initial Release - Chad Strickert		
14MR08	Revised - Chad Strickert		

TITLE	
INSTALLATION INSTRUCTIONS	
Spare Tire Kit	
PART NO.	SHEET 1 OF 18
19202099	